


## Tying two half-hitches


1

Run rope through the tiedown eyelet from the back of the airplane to the front.




2

Circle the line around and through to form the first of two half-hitches, six to 12 inches from the airplane's tiedown eyelet.

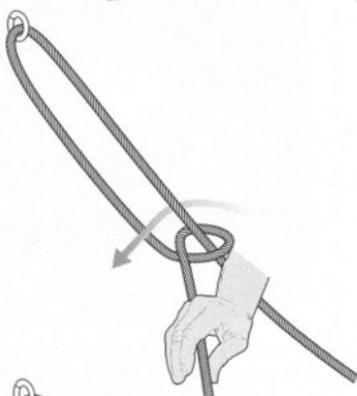


3

Repeat to form a second half-hitch, pulling the line around and over the first, then locking it under the first with a sharp tug.

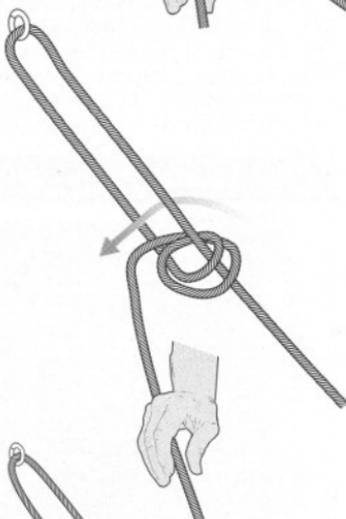

4

Now form a second set of half-hitches, six to 12 inches below the first set, by repeating steps 2 and 3.

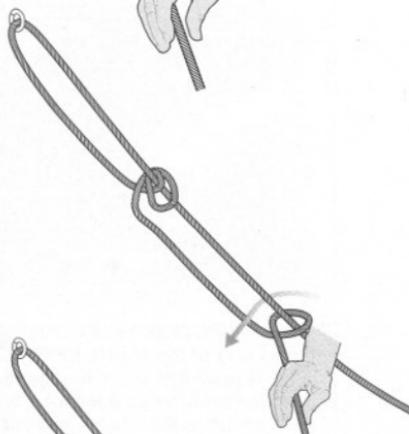

5

The two sets of half-hitches are complete. For best results, use proper line and solid ground attachment points.

